




locky tech

CLOUD BASED ACCESS CONTROL

Locky

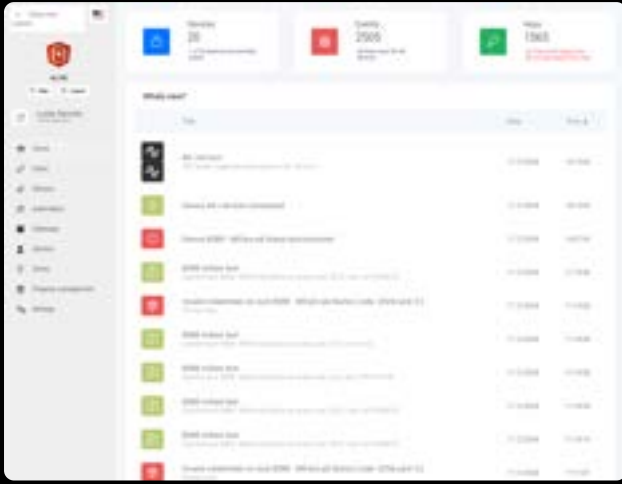

The Locky Cloud Access Control System is a secure, scalable, and easy-to-use solution for managing access to multiple properties. It supports remote configuration, real-time monitoring, and integration with third-party systems, providing flexibility for businesses and property managers. Designed for simplicity, it combines advanced security features with cloud-based convenience, ensuring seamless access sharing and management.

📶 Wireless communication

↔️ Up to 100 meters range

🔋 Up to 3 years battery

Technical details

Browser supported	Chrome, edge, firefox
Encryption	SHA-256
Responsive	Supported by phones
Features	Update codes, timed automation, gateway overview, notifications, automated messages, device overview, etc.
Uptime	99%+
Number of devices	1000+
Api	Public api for integrations
Zones	Group zones into group for easier administration
Support	Free support by email and phone
Easy to use	Built to be userfriendly.

Key features

- Cloud based (all you need is a web browser)
- Control from anywhere
- User management (who has access to locks)
- App support
- Automated opening time interval
- Complete overview of all locks
- Real time monitoring of locks
- Integrates to other systems
- Easy and userfriendly

Well suited for

- Storage
- Payment access
- Offices
- Private
- AirBnB / hotels
- Integrated systems

Locky CS 1248 (chrome)



Our Locky cs 1248 lock is powered with our locky pcb. This enables it with up to 3 years battery lifetime. It is easy to install and set up, and works well with the locky network, it is super reliable and have soft buttons that's easy to use. The frame is a shiny zink alloy frame and can be adapted to most of the standard doors. These doors could be asian, european, scandinavian, uk or us standards. It communicates using the blue tooth wireless technology and will always be online, meaning you can access it remotely to open it, read its log, or to force it shut. Get a complete control of you door using this lock.

 Wireless communication

 Up to 70 meters range

 Up to 3 years battery

Technical details

Certificate	FCC / CE
Unlocking	ways Code + mechanical key + remote opening + mifare
Mortise	supported Kaba 1433, DS9500, Standard 565, european (DIN), scandinavian
standard	ANSI DA, ANSI DB
Color	Silver
Warranty	2 years
Battery	4 x AA batteries
Max battery lifetime	3 years (standby)
Average battery lifetime	2 years
Operation temperature	-20°C / +50°C
Storage temperature	0°C / +45°C
Supported humidity	30 +/- 20%
Number of door openings	10000
Number of codes supported	200
Static current	≤55uA
Battery monitoring	no

Key features

- Wireless communication (up to 70 meter range)
- Solid stainless steel
- Panic release, you can always open the door from the inside.
- Can be operated from cloud / app
- Long battery lifetime
- Override using mechanical key
- Integrates to external system
- Reliable
- 4 to 8 digit codes

Well suited for

- Storage
- Payment access
- Offices
- Private
- AirBnB / hotels
- Integrated systems

Locky cs 1248 (black)



Our Locky CS 1248 black version lock is powered with our locky pcb. This enables it with up to 3 years battery lifetime. It is easy to install and set up, and works well with the locky network, it is super reliable and have soft buttons that's easy to use. The frame is a shiny zink alloy frame and can be adapted to most of the standard doors. These doors could be asian, european, scandinavian, uk or us standards. It communicates using the blue tooth wireless technology and will always be online, meaning you can access it remotely to open it, read its log, or to force it shut. Get a complete control of you door using this lock.

 Wireless communication

 Up to 70 meters range

 Up to 3 years battery

Technical details

Certificate	FCC / CE
Unlocking	ways Code + mechanical key + remote opening + mifare supported Kaba 1433, DS9500, Standard 565, european (DIN), scandinavian
Mortise standard	ANSI DA, ANSI DB
Color	Silver
Warranty	2 years
Battery	4 x AA batteries
Max battery lifetime	3 years (standby)
Average battery lifetime	2 years
Operation temperature	-20°C / +50°C
Storage temperature	0°C / +45°C
Supported humidity	30 +/- 20%
Number of door openings	10000
Number of codes supported	200
Static current	≤55uA
Battery monitoring	no

Key features

- Wireless communication (up to 70 meter range)
- Solid stainless steel
- Panic release, you can always open the door from the inside.
- Can be operated from cloud / app
- Long battery lifetime
- Override using mechanical key
- Integrates to external system
- Reliable
- 4 to 8 digit codes

Well suited for

- Storage
- Payment access
- Offices
- Private
- AirBnB / hotels
- Integrated systems

Locky CS 1250 left



The Locky CS 1250 is an advanced replacement for traditional WingCard locks, designed for easy installation using existing door carvings. Unlike standard WingCard locks, it features a built-in code panel and online connectivity for enhanced access control. Sharing the key features of the Locky CS1249, it supports RFID, Bluetooth Low Energy (BLE), and remote management via Locky Cloud. With up to 500 codes, tactile buttons for accessibility, and sensory feedback, it's both secure and user-friendly. Powered by 4 AA batteries, the Locky 1250 is an efficient and modern upgrade for hotels.

 Wireless communication

 Up to 70 meters range

 Mifare support

Technical details

Certificate	FCC / CE
Unlocking	ways Code + mechanical key + remote opening + mifare
Mortise standard	Wingcard ANSI DA, ANSI DB
Color	Silver
Warranty	2 years
Battery	4 x AA batteries
Max battery lifetime	3 years
Average battery lifetime	1.3 years, 0.77 (high performance), 2.12 (low power mode), and 3 years with no mifare
Operation temperature	-20°C / +50°C
Storage temperature	0°C / +45°C
Supported humidity	30 +/- 20%
Number of door openings	10000
Number of codes supported	200
Static current	≤240uA
Battery monitoring	yes
Escape and return	optional

Key features

- Wireless communication (up to 70 meter range)
- Solid stainless steel
- Panic release, you can always open the door from the inside.
- Can be operated from cloud / app
- Can be locked from inside
- Override using mechanical key
- Integrates to external system
- Reliable
- 4 to 8 digit codes

Well suited for

- hotels with existing wingcard standard on the door

Controller unit V1



The Locky CS Door Controller is a versatile, wall-powered unit designed to enhance door automation. It supports a wide range of access technologies, including RFID, MIFARE, code panels, and the Wiegand protocol, making it compatible with various systems. With seamless integration into Locky Cloud Access, it ensures centralized control and effortless management for multiple properties. Built for reliability, the controller is perfect for both commercial and residential applications, offering robust performance in high-traffic environments. Its compact design simplifies installation, while advanced features like real-time updates and remote configuration enhance operational efficiency. The Locky CS Door Controller is the ideal choice for upgrading to a smart, secure, and scalable access solution.

 Wifi + BLE communication

 Wall powered

 Robust

Technical details

Certificate	FCC / CE
Unlocking	iplink, QR code, virtual code panel, code panel, wiegand, mifare, code, code+mifare
Motor	Signal for motor
Volt	Supports both 12 and 24 volt
Color	Black
Warranty	2 years
Power adapter	Supports and DC 12 / 24V adapter
Electronic strike/magnet	output for 12V or 24V
Exit button	Supports both internal and external opening button
Operation temperature	-20°C / +50°C
Storage temperature	0°C / +45°C
Supported humidity	30 +/- 20%
Number of door openings	10000
Number of codes supported	400
Static current	≤100uA

Key features

- Wide Access Compatibility
- Seamless Cloud Integration
- Reliable Wall Power
- Remote Configuration Management
- Compact Durable Design
- Scalable Property Solution
- Real-Time Activity Updates
- Encrypted Secure Communication
- Easy Quick Installation
- Supports Door Automation
- High Traffic Reliability
- Versatile Access Technologies

Office Buildings.

- Hotels and Resorts
- Educational Institutions
- Healthcare Facilities
- Residential Complexes
- Retail Stores

Gateway



The Locky Gateway enables seamless communication between Locky locks and cloud-based systems. Compact and efficient, it connects via a 5V USB adapter and offers a range of up to 70 meters in open spaces. Ideal for remote access control, it ensures reliable, real-time updates and management. Designed for easy integration, the gateway is a perfect fit for modern smart access solutions.

📶 Wireless communication

↔️ Up to 100 meters range

🔋 Up to 3 years battery

Technical details

Certificate	FCC / CE
Unlocking	ways Code + mechanical key + remote opening + mifare
Mortise	supported Kaba 1433, DS9500, Standard 565, european standard, scandinavian
standard	ANSI DA, ANSI DB
Color	Silver
Warranty	2 years
Battery	4 x AA batteries
Max battery lifetime	3 years (standby)
Average battery lifetime	2 years
Operation temperature	-20°C / +50°C
Storage temperature	0°C / +45°C
Supported humidity	30 +/- 20%
Number of door openings	10000
Number of codes supported	200
Static current	≤55uA

Key features

- Wireless communication (up to 100 meter range)
- Solid stainless steel
- Panic release, you can always open the door from the inside.
- Can be operated from cloud / app
- Long battery lifetime
- Override using mechanical key
- Integrates to external system
- Reliable
- 4 to 8 digit codes

Well suited for

- Storage
- Payment access
- Offices
- Private
- AirBnB / hotels
- Integrated systems